

S4K MeetingPod









S4K MeetingPod

4K | 120° | See More | Clean voice | Voice great



S4K MeetingPod



120° wild filed of vision



4K camera



USB plug and play



All in one design




Clean voice, Voice great






S4K MeetingPod

All in one design

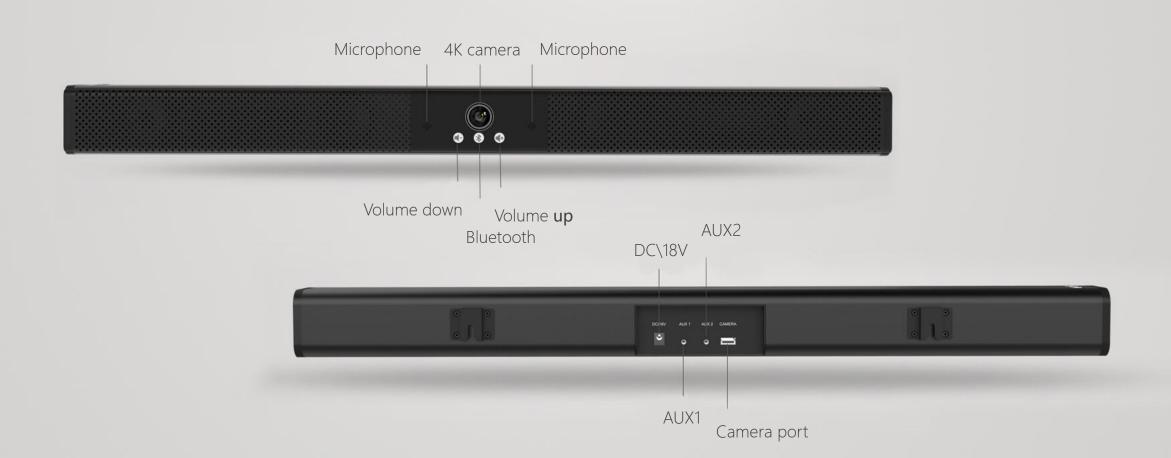





Has wild filed of vision, so every one in the room can show in camera









4K UHD camera

Support 4K (ultra high definition) ,1080p (full high definition) and 720p (high definition) can match the application and image quality of monitor



Clean voice, Voice great


S4K MeetingPod integrated audio is specially designed for perfect acoustics in crowded room, filling it with impressive sound.

The audio in front of indoor can provide intuitive and consistent auditory experience.







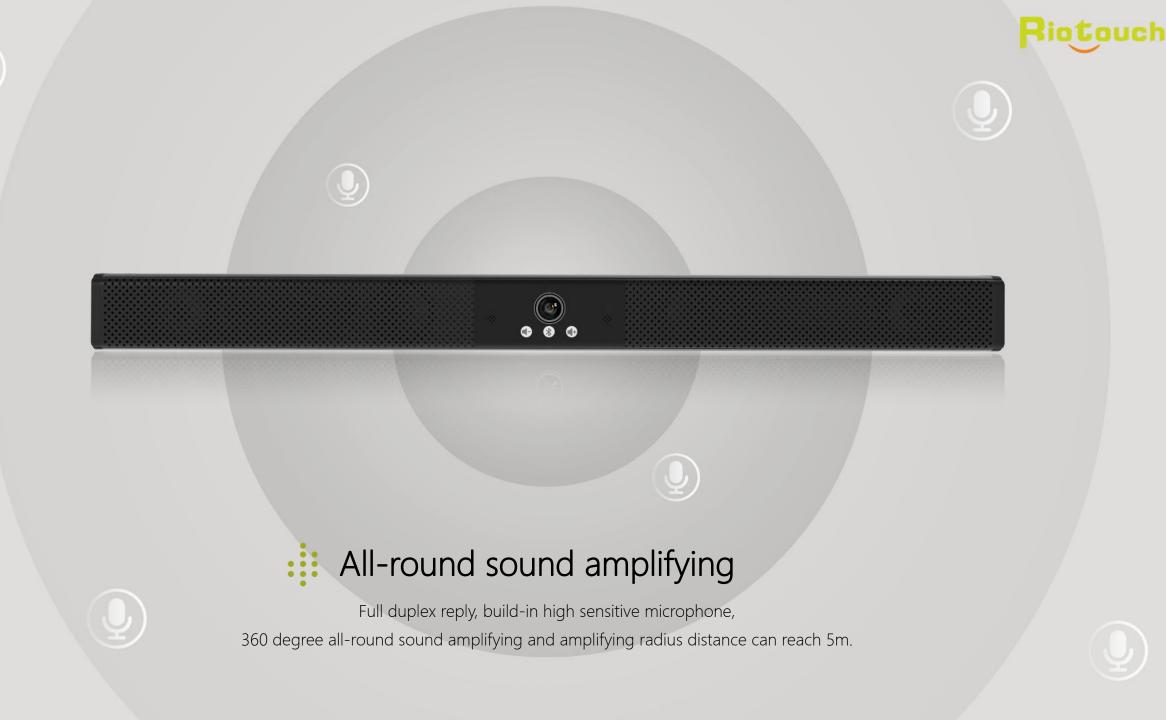



Easy installation

Potable, easy installation, quickly connect to video conference and provide better solution for video collaborative conference.







Mobile stand installation Wall mounted installation





Fashion black and elegance red for your choice



camera

 Sensor Type
 1/2.5"

 Focal Length
 2.22 mm ± 5%

 FNo.
 2.4± 5%

 Total Length(in air)
 24.1± 0,2mm

 Max Image Circle
 Ø7.4mm

 Optical FOV(D)
 120°± 3°(Ø7.2mm)

 Optical FOV(H)
 110°± 3°(Ø6.22mm)

75°± 3°(Ø3.5mm)

≤5%(Ø7.2mm)

>40%

12.5°

TV Distortion

Max Chief Ray Angle

Relative Illumination

sensor

Chroma

Application

Image size
Total number of pixels
Number of recommended recording pixels
Max Frame Rate(frames/s)@All pixels
I/F

1/2.5 3864*2218 approx. 8.57 M pixels pixels 3840*2160 8.29M aspect 16:9 els 30 sub LVDS 10ch MIPI 4Lane Color,RGB DSC Cam ISP

Compression formatPort MJPEG / YUV2 (YUYV)
Interface type USB2.0
Microphones Bluilt-in

MicrophonesBluilt-inClock Frequency6-72 MHZ

Power supply USB BUS POWER

Power consumption DC 5V,260mA

Auto Exposure Control (AEC) support
Auto White Balance (AEB) support
Auto Gain Control (AGC) support

Speakers

optical FOV(V)

Amplifier

Storage temperature -20°C to 70°C Operating temperature 0°C to 60°C Input Voltage 18VInput Current 4AInput resistance $8\Omega^*4$ Type of enlargement D Type
Gain 20dB

Work efficiency 0.9

Frequency Range 100HZ- 20KHZ

 $\begin{array}{ll} \text{Output Power} & 15\text{W}^*4 \\ \text{Number of channels} & 2 \\ \text{Impedance matching} & 4\Omega \end{array}$

input interface DC/AUX1/AUX2/USB

Output port 2pin(2.54mm)

BlueTooth

Launch radius 10m
Operating Voltage 3.3V
Frequency stability ±20KHz
Frequency Range 2402-2480MHZ



			Condition	Value
Directivity	Omni-Directional	Sensitivity	f=1kHz, S.P.L =1Pa, 0dB=1V/Pa	-38dB
Connectivity	USB 2.0	Output impedance	f=1 kHz	2.2kΩ
		Current Consumption	$VCC=2.0V$, $RL = 2.2k\Omega$	150~500 <i>μ</i> A
		S/N Ratio	f=1kHz, S.P.L =1Pa (A-Weighted Curve)	58dB
		S-VS	VCC=2.0V to 1.5V	-3dB
		Operating Voltage	N/A	2dB (Center)
		Maximum input S.P.L.	N/A	110dB (Max)

Operating system &	Environment
--------------------	-------------

Physical specifications

Accessories

Storage temperature Operating temperature Support OS -20°C to 70°C 0°C to 60°C WinXP/Vista/Win7/Win8/Win10

Linux with UVC (above linux-

2.6.26)

MAC-OS X 10.4.8 or later Android 4.0 or above with UVC Product Size
Package dimensions
Net weight
Gross weight

715*60*60 mm(L*W*H) 950*120*130 mm(L*W*H) 1.69KG 2.60KG

Adaptor
USB Cable
3.5mm Audio Cable
Bracket

18V/3.5A 1pcs 1.5m 1pcs 1.5m 1pcs 1 set

Benefits

Integrated HD camera, microphone, loud speaker, DSP and audio processing chip in one.

04 Bluetooth wireless technology

Pairing with devices via bluetooth and enjoy excellent audio calls .

07 USB HID

Easily connect to PC, Mac and ChromeTM device, and no need additional software.

01 All-in one design 02 4K HD camera

Support 4K(ultra HD) 1080p(full HD) and 720p(HD), can match the application and image quality of monitor.

05 All-round sound amplifying

Full duplex reply, build-in high sensitive microphone, build-in 360 degree allround sound amplifying and amplifying radius distance can rach 5m.

08 Easy installation

Potable, easy installation, quickly connect to video conference and provide better solution for video collaborative conference

03 120° wild filed of vision

Has wild field of vision, so everyone in the room can show in camera.

06 build-in loud speaker

build-in high power loud speaker, which can meet the need of small conference about 5 to 10 persons. AGC control and clear sound quality.

09 Multi-installation choice

Can install S4K on the desk, wall and monitor, etc., so it will provide great experience in a crowded meeting room.





Thanks



Scan for more infomation