
# LED Outdoor Poster Display

640mmx960mm


P1.538 / P1.86 / P2 / P2.5 / P3.076



# Ultra HD Outdoor Display

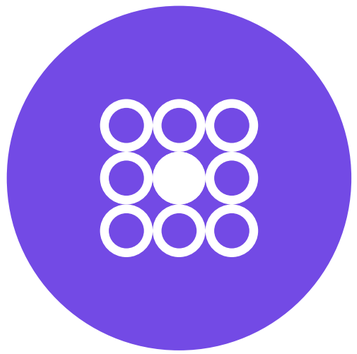

Multiple Pixel Pitch
Options Available

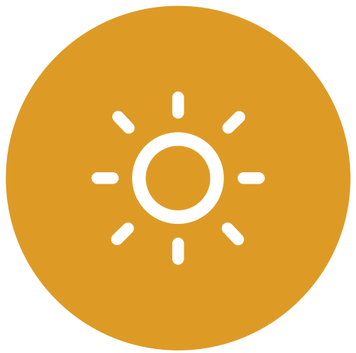

4000-5500cd Ultra
High Outdoor Brightness





3840/7680Hz
Ultra High Refresh Rate



14-16Bit High Gray
Scale Color Restoration

# GOB Coated Anti-Damage Lamp Bead Technology

Equipped with 1010/1415 lamp beads and GOB coating, anti-collision, moisture-proof and anti-oxidation, greatly reduce dead pixel failure and cut after-sales cost outdoors.

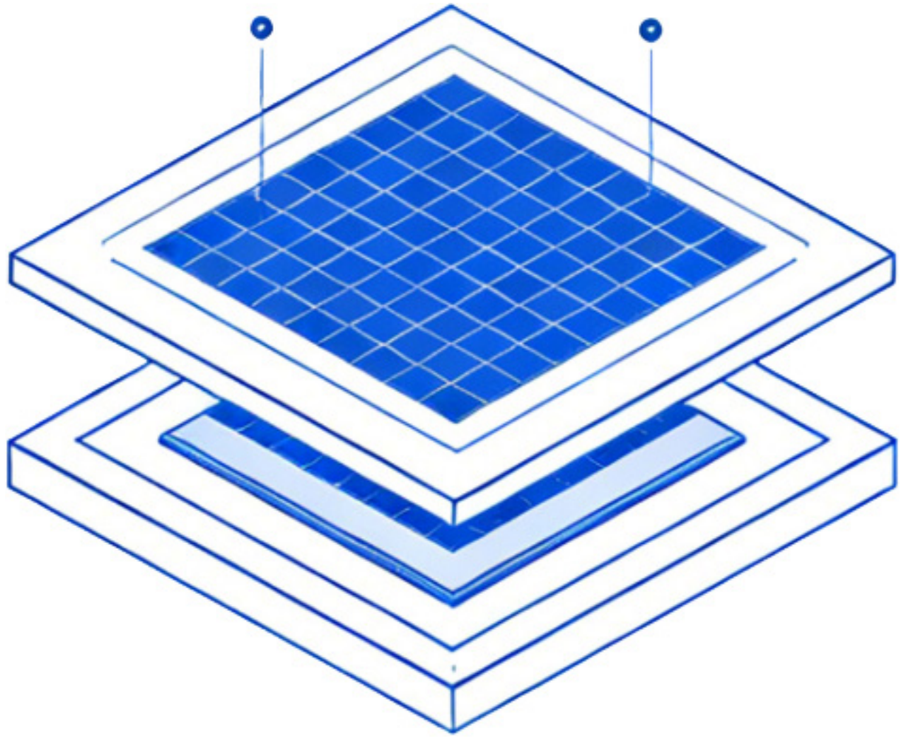




# IP65 All-Weather Outdoor Protection

The whole machine reaches IP65 professional waterproof and dustproof grade, works stably in rain, dust and strong sunlight, and is durable for long-term outdoor use.

# Wireless Content Update via Mobile APP

Dedicated mobile APP supports wireless upload of posters, videos and promotions without PC, one-click update for new arrivals and holiday campaigns any-time.






# 24kg Lightweight Body with Universal Casters

Lightweight 24kg unit with silent casters, easy for one person to push and move, flexible placement at storefronts, exhibitions and markets.

# Scene Display




Hospital




School




Shopping Mall




Restaurant

| LED Outdoor Display Technical Specifications | | | | | |
|---|---|---|---|---|---|
| **Module Model** | **P1.538** | **P1.86** | **P2** | **P2.5** | **P3.076** |
| Pixel Spacing | P1.538mm | P1.86mm | P2mm | P2.5mm | P3.076mm |
| Module Size | 320×160mm | | | | |
| Lamp Bead Model | 1010+GOB | | | 1415 | |
| Module Resolution | 208×104Dot | 172×86Dot | 160×80Dot | 128×64Dot | 104×52Dot |
| Scan Mode | 35S | 29S | 20S | 16S | 13S |
| Number of Modules | 2×6 | | | | |
| Display Area | 0.6144/㎡ | | | | |
| Display Size | 640×960mm | | | | |
| Whole Screen Weight | 24Kg | | | | |
| Full Screen Resolution | 416×624 | 344×516 | 320×480 | 256×384 | 208×312 |
| Brightness | 4000CD | | | 5500CD | |
| Refresh Frequency | 3840Hz / 7680Hz | | | | |
| Gray Level | 14-16Bit | | | | |
| Maintenance Method | Rear Maintenance | | | | |
| Protection Grade | IP65 | | | | |
| Average Power | 101 W | | | 138 W | |
| Max Power Consumption | 338 W | | | | |
| Product Features | Battery optional, plug & play, pulley moving design, content editable via mobile APP | | | | |