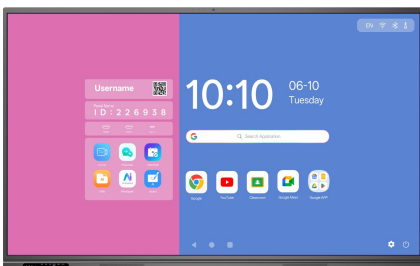
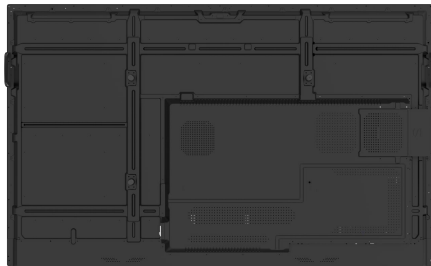


IR Touch Interactive Flat Panel Display

Model		LTF65	LTF75	LTF86	LTF98
Image	 				
Display					
Diagonal display size		65(inch)	75(inch)	86(inch)	98(inch)
Bezel color	Aluminum frame(Black color)	√	√	√	√
Panel type	DLED	√	√	√	√
Active area (mm)	(H×V)	1428.48 * 803.52	1649.66 * 927.93	1895.04 * 1065.96	2158.85×1214.35
Resolution	3840*2160 /60hz	√	√	√	√
Pixel Pitch	mm x mm	0.372 x 0.372	0.429 x 0.429	0.4935 x 0.4935	0.5622×0.5622
Hardness Glass	Mohs-7 level (Mohs-9 level for option)	√	√	√	√
Glass Panel	Anti-Glare glass with zero bonding	√	√	√	√
Aspect Ratio	16:9	√	√	√	√
Contrast Ratio	1200:1 (4000:1 is for option)	√	√	√	√
Brightness	350cd/m2 (450cd/m2 is for option)	√	√	√	√
Color depth	1.07 billion colors	√	√	√	√
Viewing angle	178°	√	√	√	√
Life span	50,000 hours	√	√	√	√
Touch					
Touch Technology	IR touch	√	√	√	√
Multi Touch	40 points touch	√	√	√	√
Touch Precision	1 mm (over 90% Area)	√	√	√	√
Auto-Calibration	Yes	√	√	√	√
Anti-light	Yes	√	√	√	√
Minimum object size	2mm	√	√	√	√
Touch Response Time	First Point <2 ms, Continuation <8 ms	√	√	√	√
Supporting OS	Windows 7/8/10/11; Android; Mac; Linux; Chrome OS	√	√	√	√
Speakers					
Front Speakers	15W*2	√	√	√	√
Microphoe (Option)					
Microphone type	Linear equidistant microphone array	√	√	√	√
Number of MIC	8 mics	√	√	√	√
Automatic switching (OPS, Android)	Yes	√	√	√	√
Camera (Option)					
Image sensor	48M	√	√	√	√
Maximum resolution	8000*6000@5fps 4200*3120@20fps	√	√	√	√
Lens	D=119 degree H=97 V=74	√	√	√	√
Front Side Connections					
Type-c	Full function 65W	√	√	√	√
HDMI out	1	√	√	√	√
HDMI in	1	√	√	√	√
USB 3.0	3	√	√	√	√
USB-B	1	√	√	√	√
Front Keys	From left to right: Button 1 (short press reverses signal, long press decreases volume); Button 2 (middle) is the power switch; Button 3 (short press forwards signal, long press increases volume).				
Back Side Ports					
OPS Slot (80-pin)	2	√	√	√	√
General Information					
Power Supply	~ 100-240 V (50/60Hz)	√	√	√	√
Standby Energy Consumption	≤ 0.5 W	√	√	√	√
Power Consumption		Maximun< 290W Eco<75W	Maximun< 320W Eco<75W	Maximun< 350W Eco<75W	Maximun< 510W Eco<75W
Net Weight	(KG±2)	45	55	70	110
Gross Weight	(KG±2)	55	68	85	130
Screen Dimensions	(WxDxH)	1485*101.7*900mm	1707*102*1025 mm	1953.5*102*1164 mm	2020.5*103*1207
Dimensions Package	(WxDxH)	1594*175*1020mm	1821*175*1140mm	2059*175*1292mm	2130.5*175*1317mm
VESA Standard	(mm)	400*500 mm	400*700 mm	600*800 mm	600*900
Working environment					
Operating Temperature	0°C - 40°C/32 - 100 °F	√	√	√	√
Storage Temperature	-20°C - 60°C/-4 - 140 °F	√	√	√	√
Storage Humidity	10 % - 90 %	√	√	√	√
Usage Humidity	10 % - 90 %	√	√	√	√
Accessories					
Accessories	WIFI antenna * 3; inkless pen * 2, remote control * 1, 1.5m power cord * 1, 1.5m HDMI cable * 1, 1.5m USB touch cable * 1 (optional 3m, 5m); wall mounting kit				